

# Self-Contained 120/240 Vac Power Supply

Effective: August 2002

For AnaLASER® II Detectors

89.258

# FENWAL®

## FEATURES

- UL Listed
- FM Approved
- ULC Listed
- CSFM Listed 7259-1076:167
- NYC MEA Approved MEA 60-02-E
- 120 or 240 Vac Input
- 24 Vdc Output
- 4 Hours of Battery Backup
- Integral Battery Charger
- Fully Supervised
- Easily Integrated with an AnaLASER® II Detector



AnaLASER II Detector with Optional Self-Contained Power Supply

## DESCRIPTION

The Self-Contained 120/240 Vac Power Supply Assembly provides supervised 24 Vdc power with 4-hour backup for a single AnaLASER® II Detector. The universal input accepts either 120 Vac or 240 Vac input voltage and does not require manual voltage selection to operate in either range.

The Self-Contained 120/240 Vac Power Supply Assembly is designed with a matching enclosure to attach to the bottom of an AnaLASER II Detector to create a Self-Contained AnaLASER II Detector Assembly.

The enclosure holds the power supply/battery charger and two sealed lead-acid batteries. This will provide power with 4 hours battery back-up for an AnaLASER II Detector, making it ideal for single zone detection applications in a facility with emergency power systems.

The power supply/battery charger supervises the input AC power, the batteries and the battery charger. A trouble signal provides power supply supervision to the AnaLASER II Detector. There are no controls on the power supply.

The Self-Contained AnaLASER II Detector Assembly is designed for surface mounting with a painted steel backbox and a light gray polycarbonite cover. All wiring from the power supply to the Detector is routed through matching knockouts on the top of the power supply and on the bottom of the AnaLASER II Detector.

The power supply is listed and approved as a smoke detector accessory.


## POWER SUPPLY TECHNICAL SPECIFICATIONS

<b>Input Voltage:</b>	120 or 240 Vac 50/60 Hz. Must be fed from an emergency power circuit
<b>Maximum Input Current:</b>	333 mA at 120 Vac, 200 mA at 240 Vac
<b>Operating Temperature:</b>	32° to 120° F (0° to 49°C)
<b>Operating Humidity:</b>	10 to 93% RH, non-condensing
<b>Output Voltage:</b>	28.75 Vdc
<b>Output Current:</b>	1 A maximum
<b>Battery Charge Voltage:</b>	27.3 Vdc
<b>Battery Charging Circuit:</b>	500 mA
<b>Trouble Output:</b>	Normally closed TTL logic
<b>Electrical Connections:</b>	18 to 14 AWG (0.75 to 2.08 mm <sup>2</sup> ) wiring to terminal block
<b>Shipping Weight:</b>	7.4 lb. (3.4 kg)
<b>Dimensions:</b>	12.6" W x 4.55" H x 4.25" D 32 cm W x 11.5 cm H x 10.8 cm D

## BATTERY TECHNICAL SPECIFICATIONS

<b>Nominal Voltage:</b>	12 Vdc
<b>Capacity:</b>	2 AH
<b>Construction:</b>	Sealed Lead-Acid
<b>Termination:</b>	0.187 quick disconnect terminals
<b>Dimensions:</b>	5.91" W x 3.50" H x 0.79" D (15 cm W x 8.9 cm H x 2 cm D)
<b>Shipping Weight:</b>	1.54 lb. (0.7 kg.)

## MECHANICAL DRAWINGS

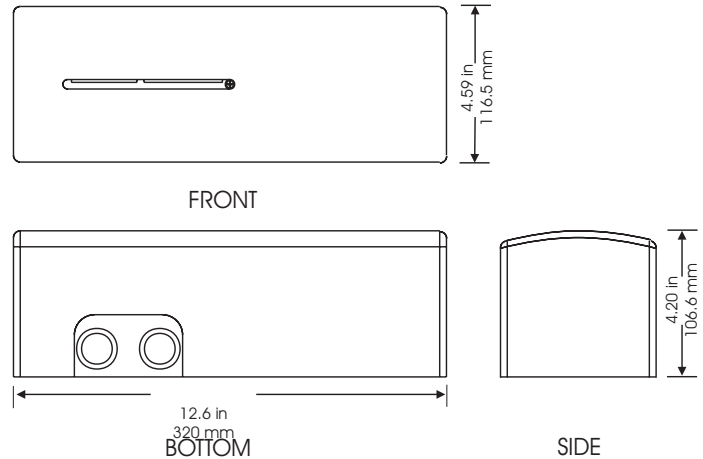

## ORDERING INFORMATION

COMPONENT	PART NUMBER
Self-Contained 120/240 Vac Power Supply Assembly. Consists of: (1) 89-300008-000 & (2) 89-300023-001	89-300008-001
Self-Contained 120/240 Vac Power Supply with Enclosure Only	89-300008-000
12 Vdc, 2.0 Ah Battery	89-300023-001



**FENWAL**  
Protection Systems

LICO Eelctronics GmbH, [www.mess-regeltechnik.at](http://www.mess-regeltechnik.at).  
A-2320 Kledering  
TEL: +43 1 706 43 000 FAX: +43 1 706 41 31  
[office@lico.at](mailto:office@lico.at)

This literature is provided for informational purposes only. FENWAL assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.  
If you need more information on this product, or if you have a particular problem or question, contact